



iliGHT

Light  
The  
World

# CATEGORY

## LED Circular Light | Direct-only Light Distribution

- LC3535 ..... 02
- LC4060 ..... 03
- LC6060 ..... 04
- LC4080 ..... 05
- LC6080 ..... 06
- LC8080 ..... 07

## LED Circular Light | Direct-indirect Light Distribution

- LC4060-U ..... 08
- LC6060-U ..... 09
- LC4080-U ..... 10
- LC6080-U ..... 11


## LED Circular Light | Inner-Outer Light Distribution

- LI2555 ..... 12
- LI2540 ..... 13
- LI3150 ..... 14
- LI3760 ..... 14


## Other Members From Our Product Family



Diameter ≤ 1200mm in One-piece  
Diameter > 1200mm in Segments

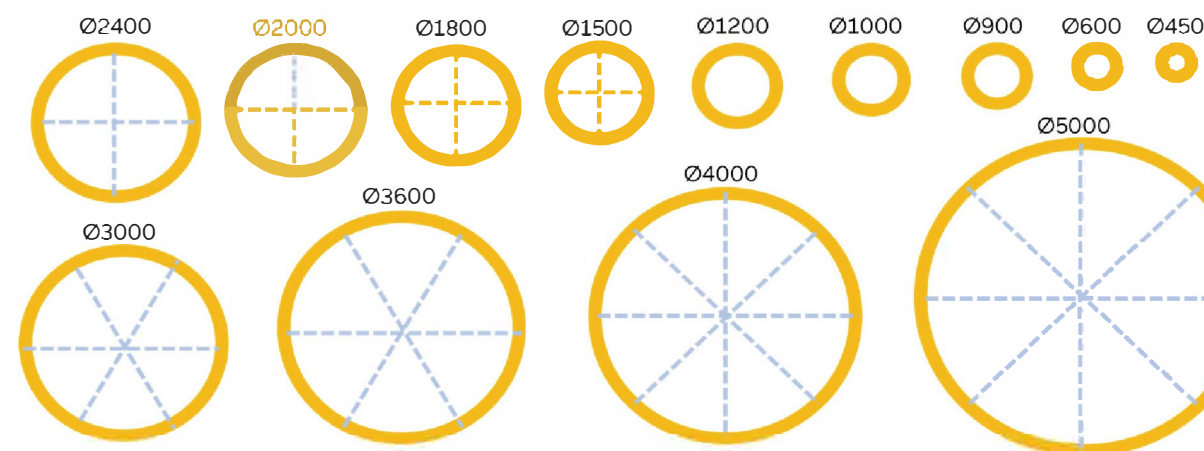


Flexible installation methods, easy operation and simply maintenance in various occasions.

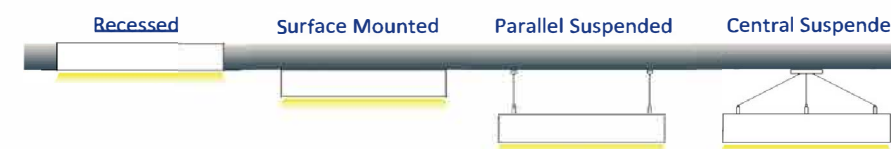

### Surface Colors

RAL 9005 Black & RAL 9003 White [Optional: RAL 9006 Silver & RAL 1036 Gold]

\* More RAL®, Pantone®, and customized surface colors are available upon request.

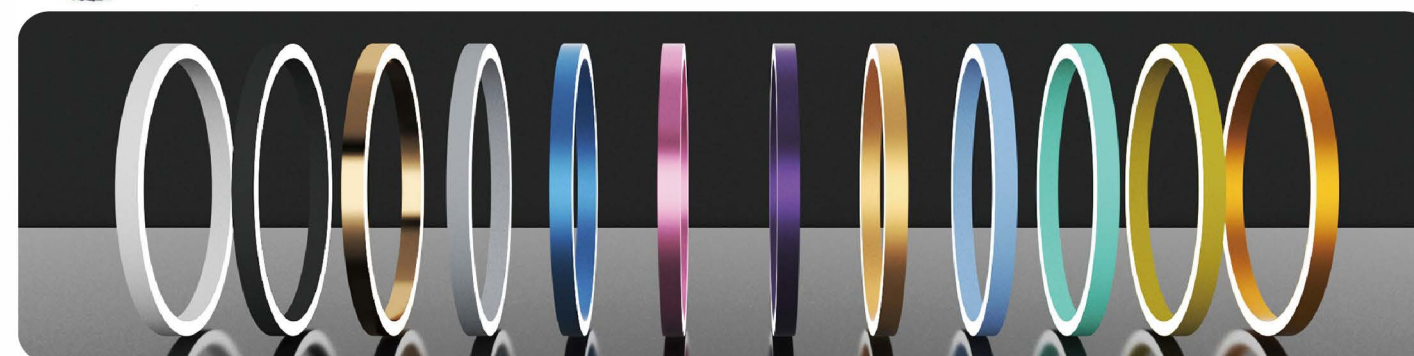


### Opal Diffuser

With maximum transmittance for general lighting




### Prismatic Diffuser


With optimized glare reduction especially for workplaces

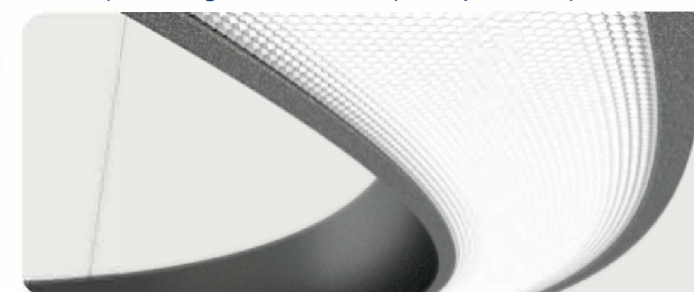



# LC3535

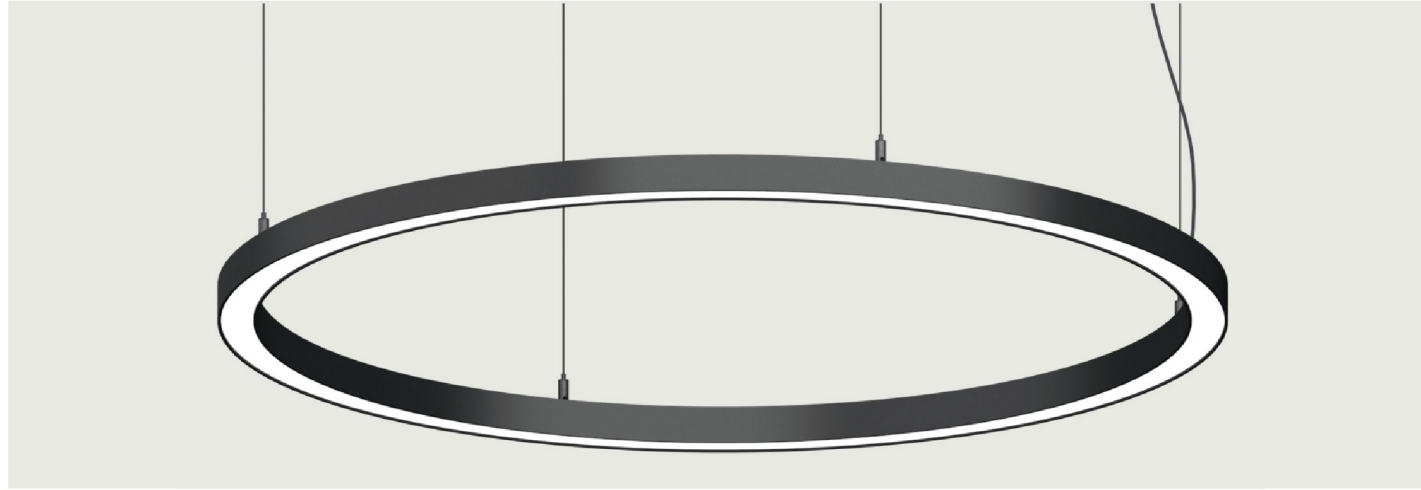

Dimensions (mm)

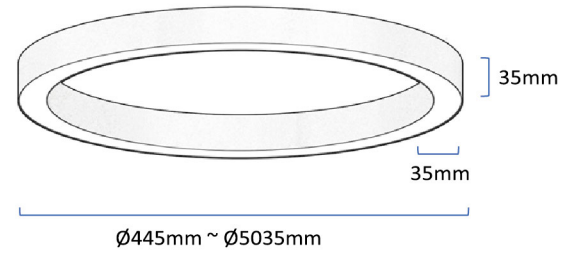


Profile size (mm)

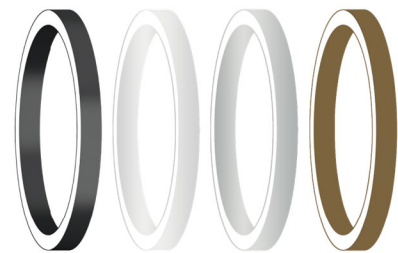

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted
IP Rate	IP20


Installations

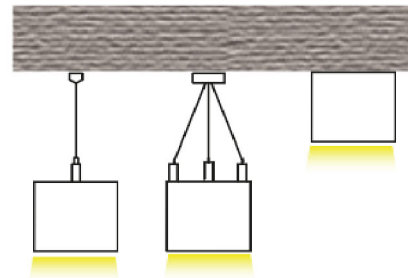


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC3535-445	1	$\varnothing 445 \times W35 \times H35$	10	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC3535-595	1	$\varnothing 595 \times W35 \times H35$	15					
LC3535-735	1	$\varnothing 735 \times W35 \times H35$	20					
LC3535-895	1	$\varnothing 895 \times W35 \times H35$	25					
LC3535-995	1	$\varnothing 995 \times W35 \times H35$	30					
LC3535-1195	1	$\varnothing 1195 \times W35 \times H35$	35					
LC3535-1535	4	$\varnothing 1535 \times W35 \times H35$	40					
LC3535-1835	4	$\varnothing 1835 \times W35 \times H35$	55					
LC3535-2035	4	$\varnothing 2035 \times W35 \times H35$	60					
LC3535-2435	4	$\varnothing 2435 \times W35 \times H35$	75					
LC3535-3035	6	$\varnothing 3035 \times W35 \times H35$	90					
LC3535-4035	8	$\varnothing 4035 \times W35 \times H35$	120					
LC3535-5035	8	$\varnothing 5035 \times W35 \times H35$	160					



# LC4060

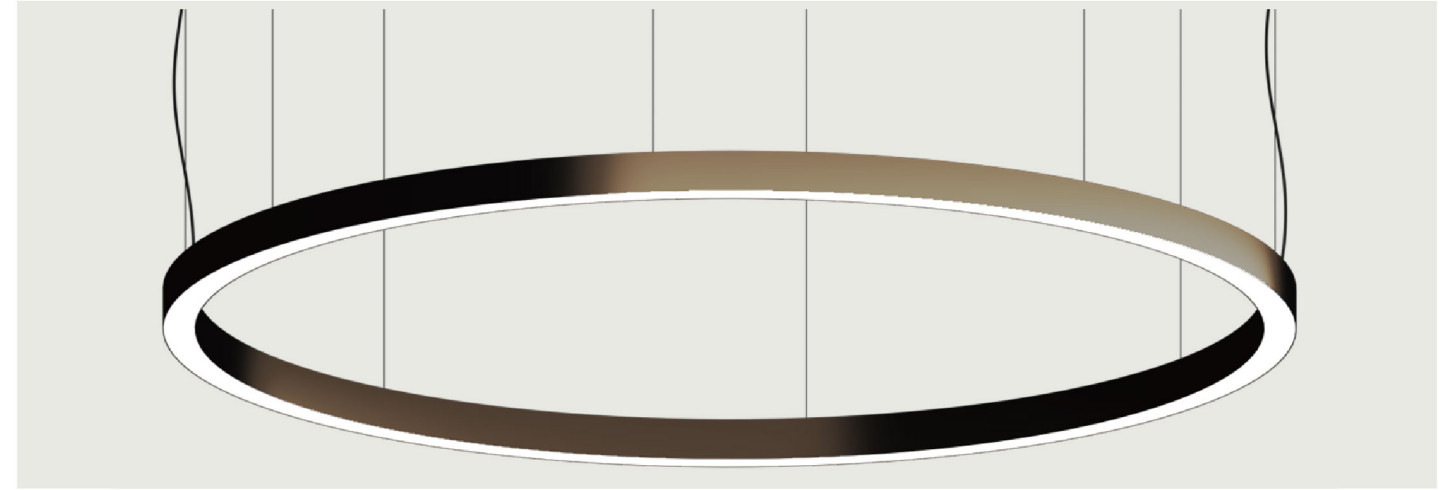

Dimensions (mm)

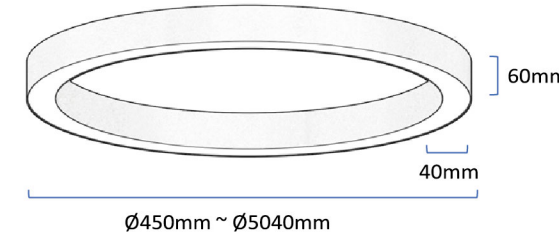


Profile size (mm)

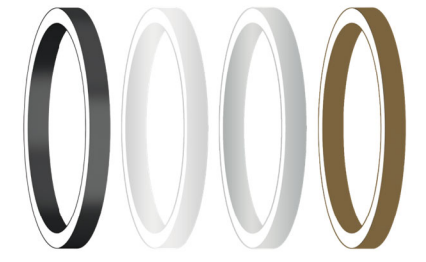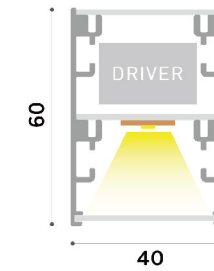

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20

Installations

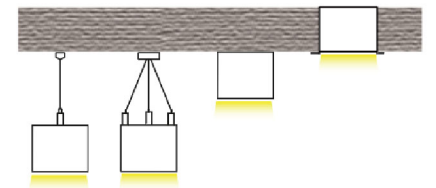


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC4060-450	1	$\varnothing 450 \times W40 \times H60$	10	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC4060-540	1	$\varnothing 540 \times W40 \times H60$	10					
LC4060-640	1	$\varnothing 640 \times W40 \times H60$	15					
LC4060-740	1	$\varnothing 740 \times W40 \times H60$	20					
LC4060-900	1	$\varnothing 900 \times W40 \times H60$	25					
LC4060-1040	1	$\varnothing 1040 \times W40 \times H60$	30					
LC4060-1200	1	$\varnothing 1200 \times W40 \times H60$	35					
LC4060-1540	4	$\varnothing 1540 \times W40 \times H60$	40					
LC4060-1840	4	$\varnothing 1840 \times W40 \times H60$	55					
LC4060-2040	4	$\varnothing 2040 \times W40 \times H60$	60					
LC4060-2440	4	$\varnothing 2440 \times W40 \times H60$	75					
LC4060-3040	6	$\varnothing 3040 \times W40 \times H60$	90					
LC4060-3640	6	$\varnothing 3640 \times W40 \times H60$	100					
LC4060-4040	8	$\varnothing 4040 \times W40 \times H60$	120					
LC4060-4540	8	$\varnothing 4540 \times W40 \times H60$	140					
LC4060-5040	8	$\varnothing 5040 \times W40 \times H60$	160					


# LC6060



Dimensions (mm)

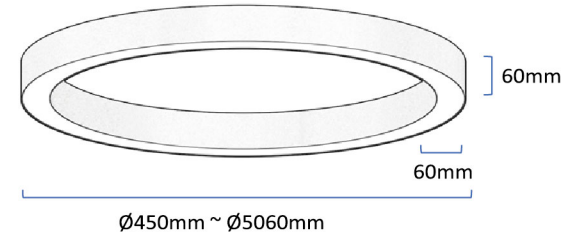


Profile size (mm)

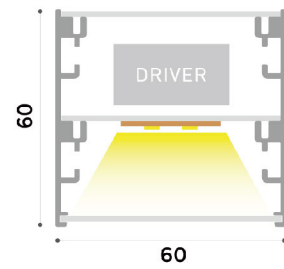

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20

Installations

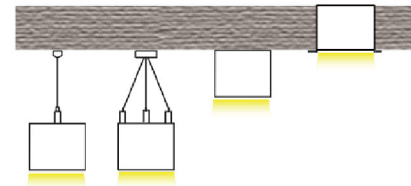


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC6060-450	1	Ø450xW60xH60	20	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC6060-660	1	Ø660xW60xH60	30					
LC6060-780	1	Ø780xW60xH60	35					
LC6060-900	1	Ø900xW60xH60	40					
LC6060-1060	1	Ø1060xW60xH60	50					
LC6060-1200	1	Ø1200xW60xH60	60					
LC6060-1560	4	Ø1560xW60xH60	80					
LC6060-1860	4	Ø1860xW60xH60	110					
LC6060-2060	4	Ø2060xW60xH60	120					
LC6060-2460	4	Ø2460xW60xH60	150					
LC6060-3060	6	Ø3060xW60xH60	180					
LC6060-3660	6	Ø3660xW60xH60	200					
LC6060-4060	8	Ø4060xW60xH60	240					
LC6060-4560	8	Ø4560xW60xH60	280					
LC6060-5060	8	Ø5060xW60xH60	320					


# LC4080



Dimensions (mm)

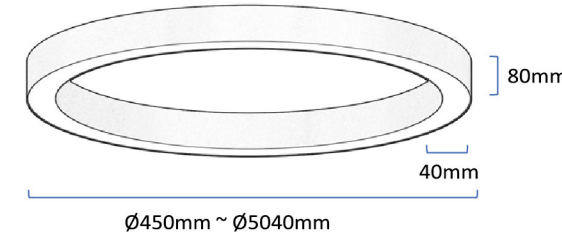


Profile size (mm)

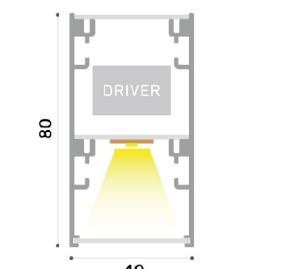

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20

Installations

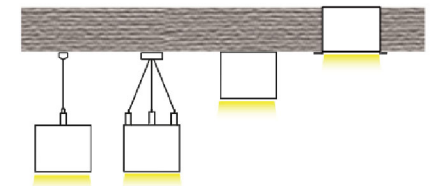


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC4080-450	1	Ø450xW40xH80	10	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC4080-540	1	Ø540xW40xH80	10					
LC4080-640	1	Ø640xW40xH80	15					
LC4080-740	1	Ø740xW40xH80	20					
LC4080-900	1	Ø900xW40xH80	25					
LC4080-1040	1	Ø1040xW40xH80	30					
LC4080-1200	1	Ø1200xW40xH80	35					
LC4080-1540	4	Ø1540xW40xH80	40					
LC4080-1840	4	Ø1840xW40xH80	55					
LC4080-2040	4	Ø2040xW40xH80	60					
LC4080-2440	4	Ø2440xW40xH80	75					
LC4080-3040	6	Ø3040xW40xH80	90					
LC4080-3640	6	Ø3640xW40xH80	100					
LC4080-4040	8	Ø4040xW40xH80	120					
LC4080-4540	8	Ø4540xW40xH80	140					
LC4080-5040	8	Ø5040xW40xH80	160					


# LC6080



Dimensions (mm)

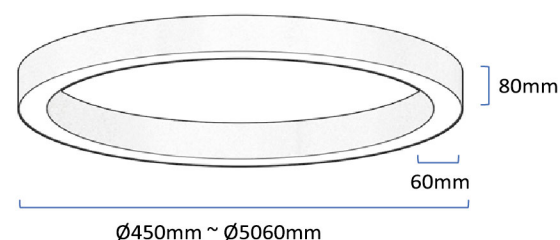

Profile size (mm)

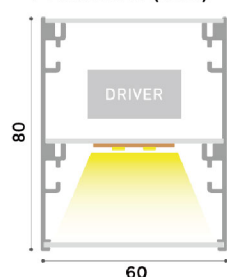

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC6080-450	1	Ø450xW60xH80	20	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC6080-660	1	Ø660xW60xH80	30					
LC6080-780	1	Ø780xW60xH80	35					
LC6080-900	1	Ø900xW60xH80	40					
LC6080-1060	1	Ø1060xW60xH80	50					
LC6080-1200	1	Ø1200xW60xH80	60					
LC6080-1560	4	Ø1560xW60xH80	80					
LC6080-1860	4	Ø1860xW60xH80	110					
LC6080-2060	4	Ø2060xW60xH80	120					
LC6080-2460	4	Ø2460xW60xH80	150					
LC6080-3060	6	Ø3060xW60xH80	180					
LC6080-3660	6	Ø3660xW60xH80	200					
LC6080-4060	8	Ø4060xW60xH80	240					
LC6080-4560	8	Ø4560xW60xH80	280					
LC6080-5060	8	Ø5060xW60xH80	320					


# LC8080



Dimensions (mm)

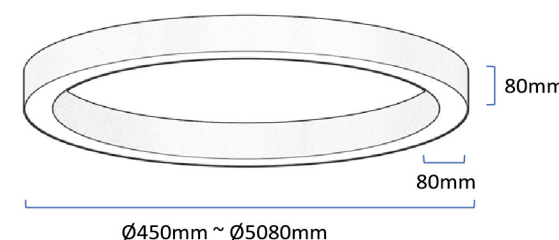

Profile size (mm)

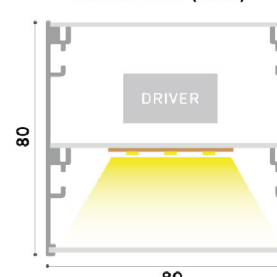


LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC8080-450	1	Ø450xW80xH80	20	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LC8080-680	1	Ø680xW80xH80	30					
LC8080-900	1	Ø900xW80xH80	50					
LC8080-1080	1	Ø1080xW80xH80	50					
LC8080-1200	1	Ø1200xW80xH80	80					
LC8080-1580	4	Ø1580xW80xH80	120					
LC8080-1880	4	Ø1880xW80xH80	160					
LC8080-2080	4	Ø2080xW80xH80	180					
LC8080-2480	4	Ø2480xW80xH80	225					
LC8080-3080	6	Ø3080xW80xH80	270					
LC8080-3680	6	Ø3680xW80xH80	300					
LC8080-4080	8	Ø4080xW80xH80	360					
LC8080-4580	8	Ø4580xW80xH80	400					
LC8080-5080	8	Ø5080xW80xH80	480					


# LC4060-U

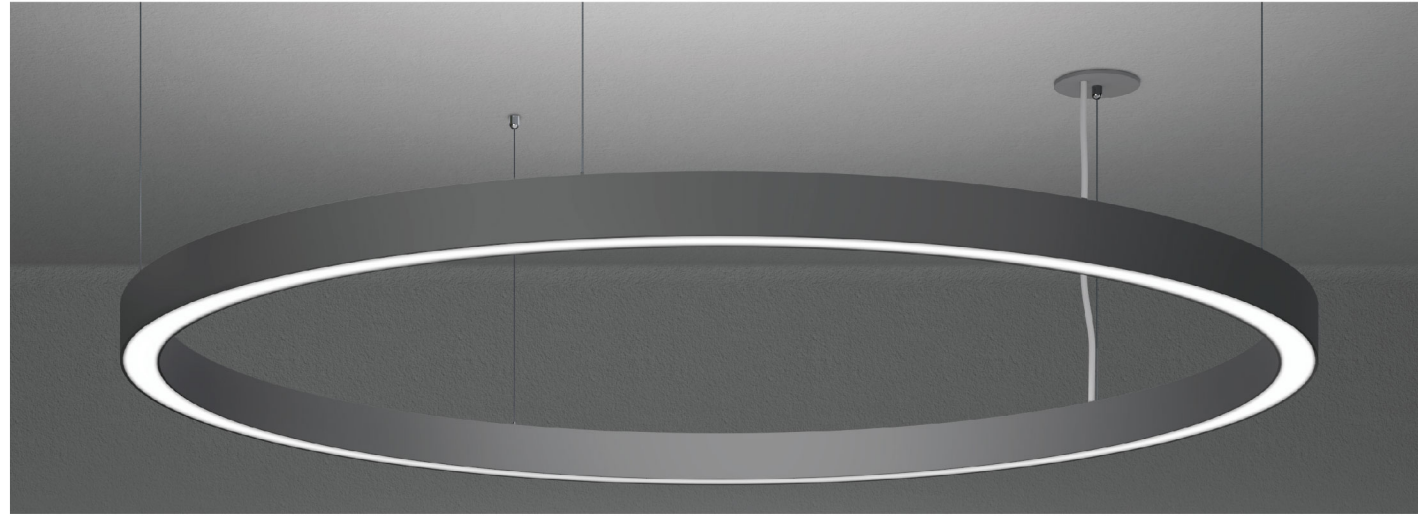

Dimensions (mm)

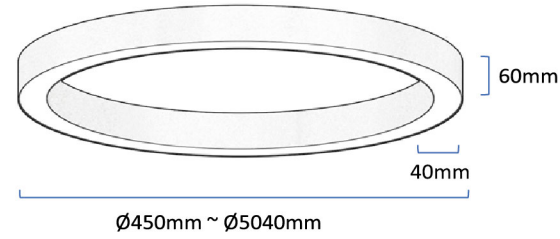

Profile size (mm)

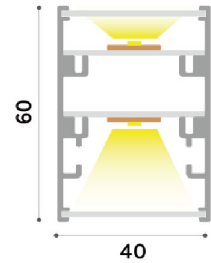


LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC4060-450-U	1	Ø450xW40xH60	10+10	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K  CCT Switch Tunable RGBW	White Black Silver Gold
LC4060-540-U	1	Ø540xW40xH60	10+10					
LC4060-640-U	1	Ø640xW40xH60	15+15					
LC4060-740-U	1	Ø740xW40xH60	20+20					
LC4060-900-U	1	Ø900xW40xH60	25+25					
LC4060-1040-U	1	Ø1040xW40xH60	30+30					
LC4060-1200-U	1	Ø1200xW40xH60	35+35					
LC4060-1540-U	4	Ø1540xW40xH60	40+40					
LC4060-1840-U	4	Ø1840xW40xH60	55+55					
LC4060-2040-U	4	Ø2040xW40xH60	60+60					
LC4060-2440-U	4	Ø2440xW40xH60	75+75					
LC4060-3040-U	6	Ø3040xW40xH60	90+90					
LC4060-3640-U	6	Ø3640xW40xH60	100+100					
LC4060-4040-U	8	Ø4040xW40xH60	120+120					
LC4060-4540-U	8	Ø4540xW40xH60	140+140					
LC4060-5040-U	8	Ø5040xW40xH60	160+160					


# LC6060-U

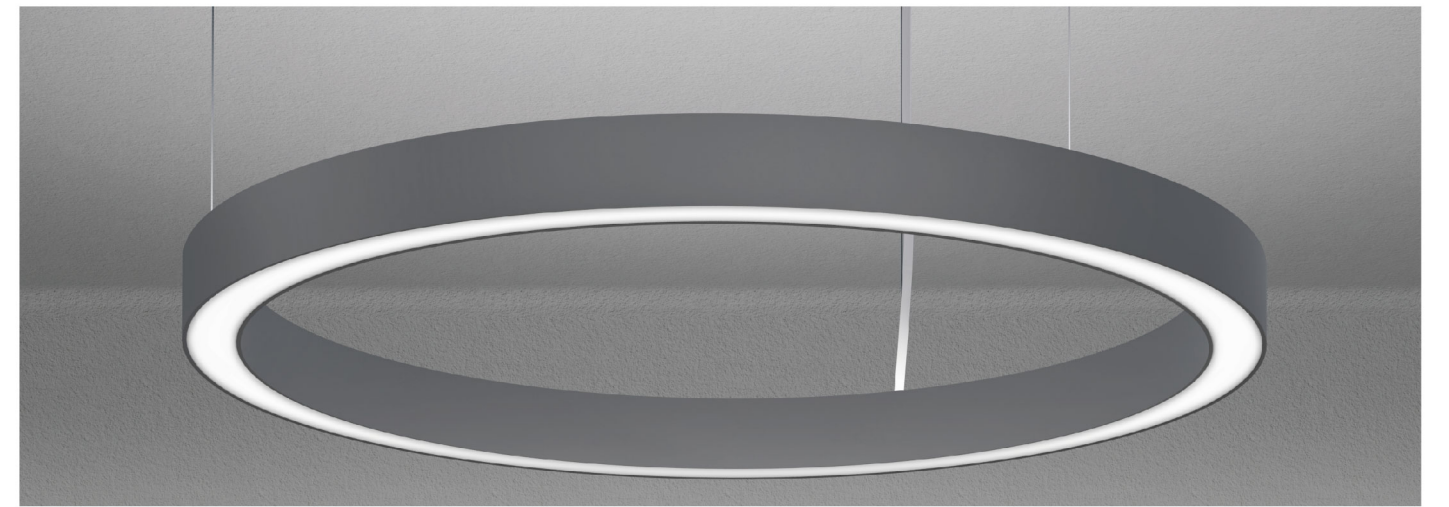

Dimensions (mm)

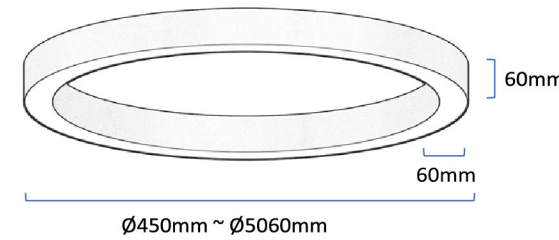

Profile size (mm)

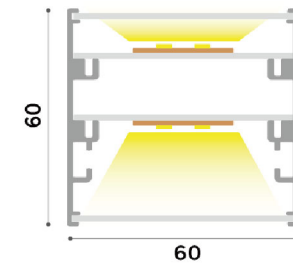

LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC6060-450-U	1	Ø450xW60xH60	20+20	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K  CCT Switch Tunable RGBW	White Black Silver Gold
LC6060-660-U	1	Ø660xW60xH60	30+30					
LC6060-780-U	1	Ø780xW60xH60	35+35					
LC6060-900-U	1	Ø900xW60xH60	40+40					
LC6060-1060-U	1	Ø1060xW60xH60	50+50					
LC6060-1200-U	1	Ø1200xW60xH60	60+60					
LC6060-1560-U	4	Ø1560xW60xH60	80+80					
LC6060-1860-U	4	Ø1860xW60xH60	110+110					
LC6060-2060-U	4	Ø2060xW60xH60	120+120					
LC6060-2460-U	4	Ø2460xW60xH60	150+150					
LC6060-3060-U	6	Ø3060xW60xH60	180+180					
LC6060-3660-U	6	Ø3660xW60xH60	200+200					
LC6060-4060-U	8	Ø4060xW60xH60	240+240					
LC6060-4560-U	8	Ø4560xW60xH60	280+280					
LC6060-5060-U	8	Ø5060xW60xH60	320+320					


# LC4080-U



## Dimensions (mm)

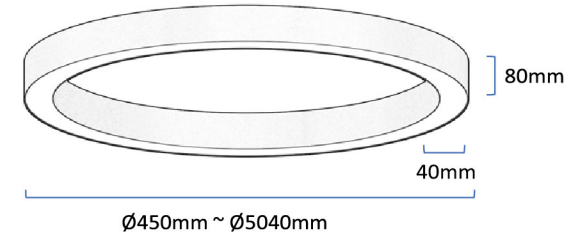

## Profile size (mm)




LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20


## Specifications

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC4080-450	1	Ø450xW40xH80	10+10	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K  CCT Switch Tunable RGBW	White Black Silver Gold
LC4080-540	1	Ø540xW40xH80	10+10					
LC4080-640	1	Ø640xW40xH80	15+15					
LC4080-740	1	Ø740xW40xH80	20+20					
LC4080-900	1	Ø900xW40xH80	25+25					
LC4080-1040	1	Ø1040xW40xH80	30+30					
LC4080-1200	1	Ø1200xW40xH80	35+35					
LC4080-1540	4	Ø1540xW40xH80	40+40					
LC4080-1840	4	Ø1840xW40xH80	55+55					
LC4080-2040	4	Ø2040xW40xH80	60+60					
LC4080-2440	4	Ø2440xW40xH80	75+75					
LC4080-3040	6	Ø3040xW40xH80	90+90					
LC4080-3640	6	Ø3640xW40xH80	100+100					
LC4080-4040	8	Ø4040xW40xH80	120+120					
LC4080-4540	8	Ø4540xW40xH80	140+140					
LC4080-5040	8	Ø5040xW40xH80	160+160					


# LC6080-U

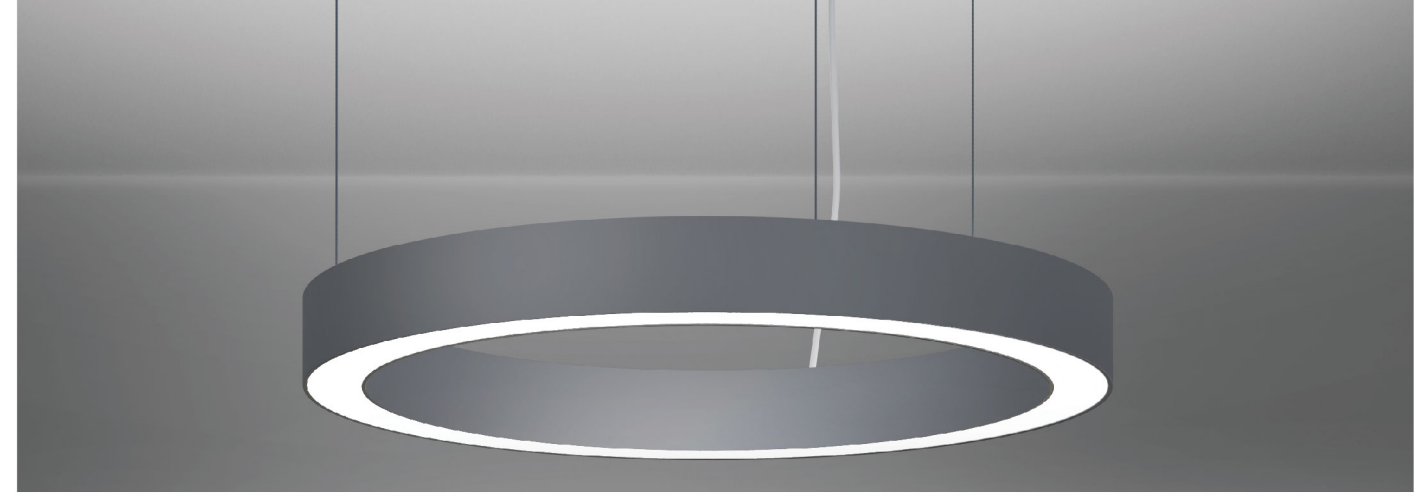

## Dimensions (mm)

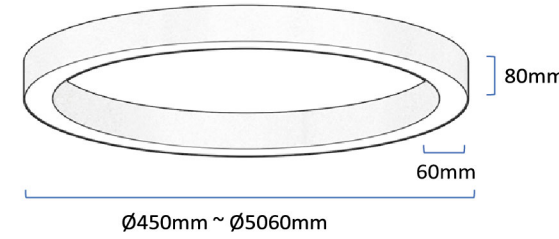

## Profile size (mm)




LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC / Prismatic PMMA / Optical Lens
Installations	Parallel Suspended / Central Suspended / Surface Mounted / Recessed
IP Rate	IP20

## Specifications



Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LC6080-450	1	Ø450xW60xH80	20+20	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi  Emergency PIR Sensor	100lm/W 120lm/W	2700K 3000K 4000K 5000K 6000K 6500K  CCT Switch Tunable RGBW	White Black Silver Gold
LC6080-660	1	Ø660xW60xH80	30+30					
LC6080-780	1	Ø780xW60xH80	35+35					
LC6080-900	1	Ø900xW60xH80	40+40					
LC6080-1060	1	Ø1060xW60xH80	50+50					
LC6080-1200	1	Ø1200xW60xH80	60+60					
LC6080-1560	4	Ø1560xW60xH80	80+80					
LC6080-1860	4	Ø1860xW60xH80	110+110					
LC6080-2060	4	Ø2060xW60xH80	120+120					
LC6080-2460	4	Ø2460xW60xH80	150+150					
LC6080-3060	6	Ø3060xW60xH80	180+180					
LC6080-3660	6	Ø3660xW60xH80	200+200					
LC6080-4060	8	Ø4060xW60xH80	240+240					
LC6080-4560	8	Ø4560xW60xH80	280+280					
LC6080-5060	8	Ø5060xW60xH80	320+320					

# LI2555

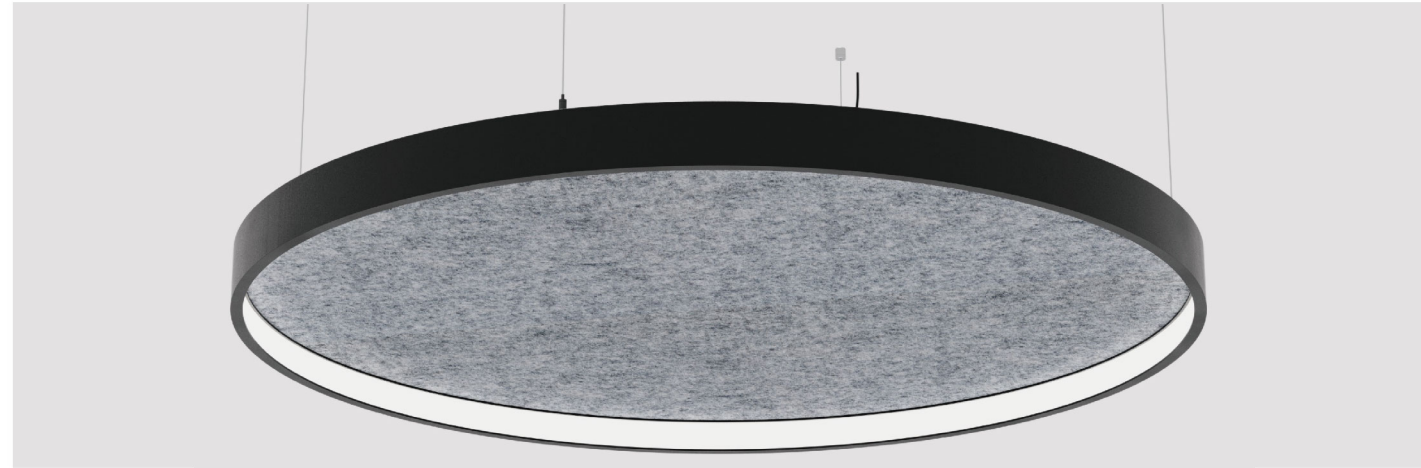

## Dimensions (mm)

## Profile size (mm)

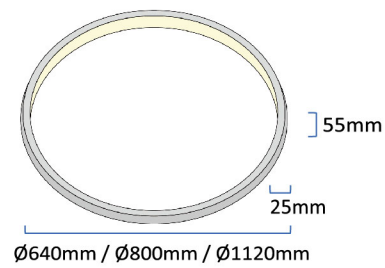

## Installations




LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC
Installations	Parallel Suspended / Central Suspended / Surface Mounted
IP Rate	IP20

## Specifications


Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LI2555-640	1	Ø640xW25xH55	30	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	40lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LI2555-800	1	Ø800xW25xH55	36					
LI2555-1120	1	Ø1120xW25xH55	53					

\* Specifically for acoustic


# LI/LO2540

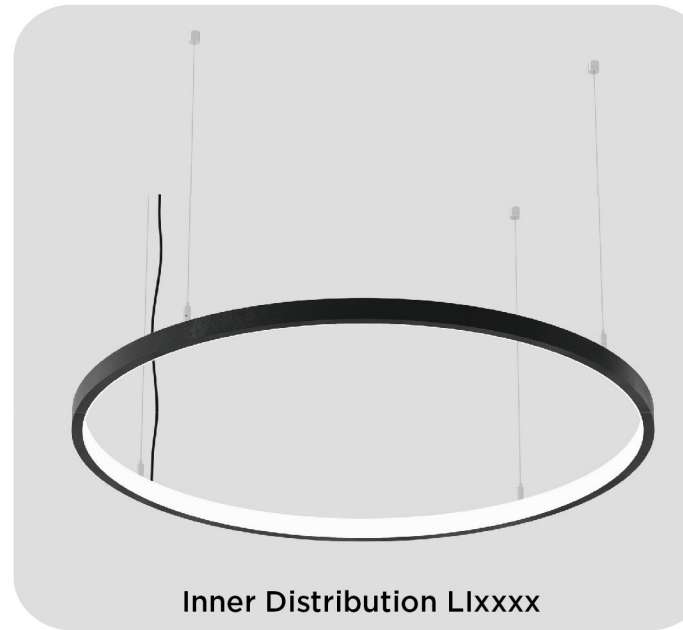


## Dimensions (mm)

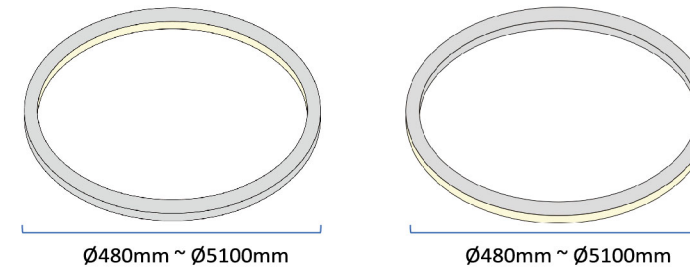

## Profile size (mm)

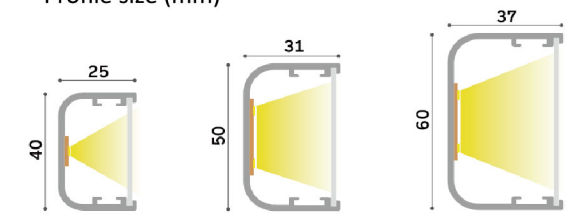

## Installations



LED Type	SMD2835
Color Rendering	CRI > 80 [Optional CRI>90 / CRI>95]
Material	Aluminum 6063-T5
Diffuser	Opal PC
Installations	Parallel Suspended / Central Suspended / Surface Mounted
IP Rate	IP20

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LI/LO2540-480	1	Ø480xW25xH40	23	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	40lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LI/LO2540-640	1	Ø640xW25xH40	30					
LI/LO2540-800	1	Ø800xW25xH40	38					
LI/LO2540-960	1	Ø960xW25xH40	45					
LI/LO2540-1120	1	Ø1120xW25xH40	53					
LI/LO2540-1440	1	Ø1440xW25xH40	68					
LI/LO2540-1720	4	Ø1720xW25xH40	80					
LI/LO2540-1910	4	Ø1910xW25xH40	90					
LI/LO2540-2300	4	Ø2300xW25xH40	110					
LI/LO2540-2550	4	Ø2550xW25xH40	120					
LI/LO2540-2870	6	Ø2870xW25xH40	135					
LI/LO2540-3190	6	Ø3190xW25xH40	150					
LI/LO2540-3820	8	Ø3820xW25xH40	180					
LI/LO2540-4460	8	Ø4460xW25xH40	210					
LI/LO2540-5100	8	Ø5100xW25xH40	240					




### LI/LO3150

Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LI/LO3150-480	1	Ø480xW31xH50	30	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	40lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LI/LO3150-640	1	Ø640xW31xH50	40					
LI/LO3150-800	1	Ø800xW31xH50	50					
LI/LO3150-960	1	Ø960xW31xH50	60					
LI/LO3150-1120	1	Ø1120xW31xH50	70					
LI/LO3150-1440	1	Ø1440xW31xH50	90					
LI/LO3150-1720	4	Ø1720xW31xH50	110					
LI/LO3150-1910	4	Ø1910xW31xH50	120					
LI/LO3150-2300	4	Ø2300xW31xH50	145					
LI/LO3150-2550	4	Ø2550xW31xH50	160					
LI/LO3150-2870	6	Ø2870xW31xH50	180					
LI/LO3150-3190	6	Ø3190xW31xH50	200					
LI/LO3150-3820	8	Ø3820xW31xH50	240					
LI/LO3150-4460	8	Ø4460xW31xH50	280					
LI/LO3150-5100	8	Ø5100xW31xH50	320					


### LI/LO3760



Item No.	Segments	Dimensions (mm)	Power (W)	Voltage	Control Gear	Luminous Efficiency	Color Temperature	Surface Color
LI/LO3760-480	1	Ø480xW37xH60	38	AC100-277V AC200-240V	On-Off 0-10V DALI PUSH Triac Casambi	40lm/W	2700K 3000K 4000K 5000K 6000K 6500K CCT Switch Tunable RGBW	White Black Silver Gold
LI/LO3760-640	1	Ø640xW37xH60	50					
LI/LO3760-800	1	Ø800xW37xH60	63					
LI/LO3760-960	1	Ø960xW37xH60	75					
LI/LO3760-1120	1	Ø1120xW37xH60	88					
LI/LO3760-1440	1	Ø1440xW37xH60	113					
LI/LO3760-1720	4	Ø1720xW37xH60	135					
LI/LO3760-1910	4	Ø1910xW37xH60	150					
LI/LO3760-2300	4	Ø2300xW37xH60	180					
LI/LO3760-2550	4	Ø2550xW37xH60	200					
LI/LO3760-2870	6	Ø2870xW37xH60	225					
LI/LO3760-3190	6	Ø3190xW37xH60	250					
LI/LO3760-3820	8	Ø3820xW37xH60	300					
LI/LO3760-4460	8	Ø4460xW37xH60	350					
LI/LO3760-5100	8	Ø5100xW37xH60	400					

### Other Members From Our Product Family

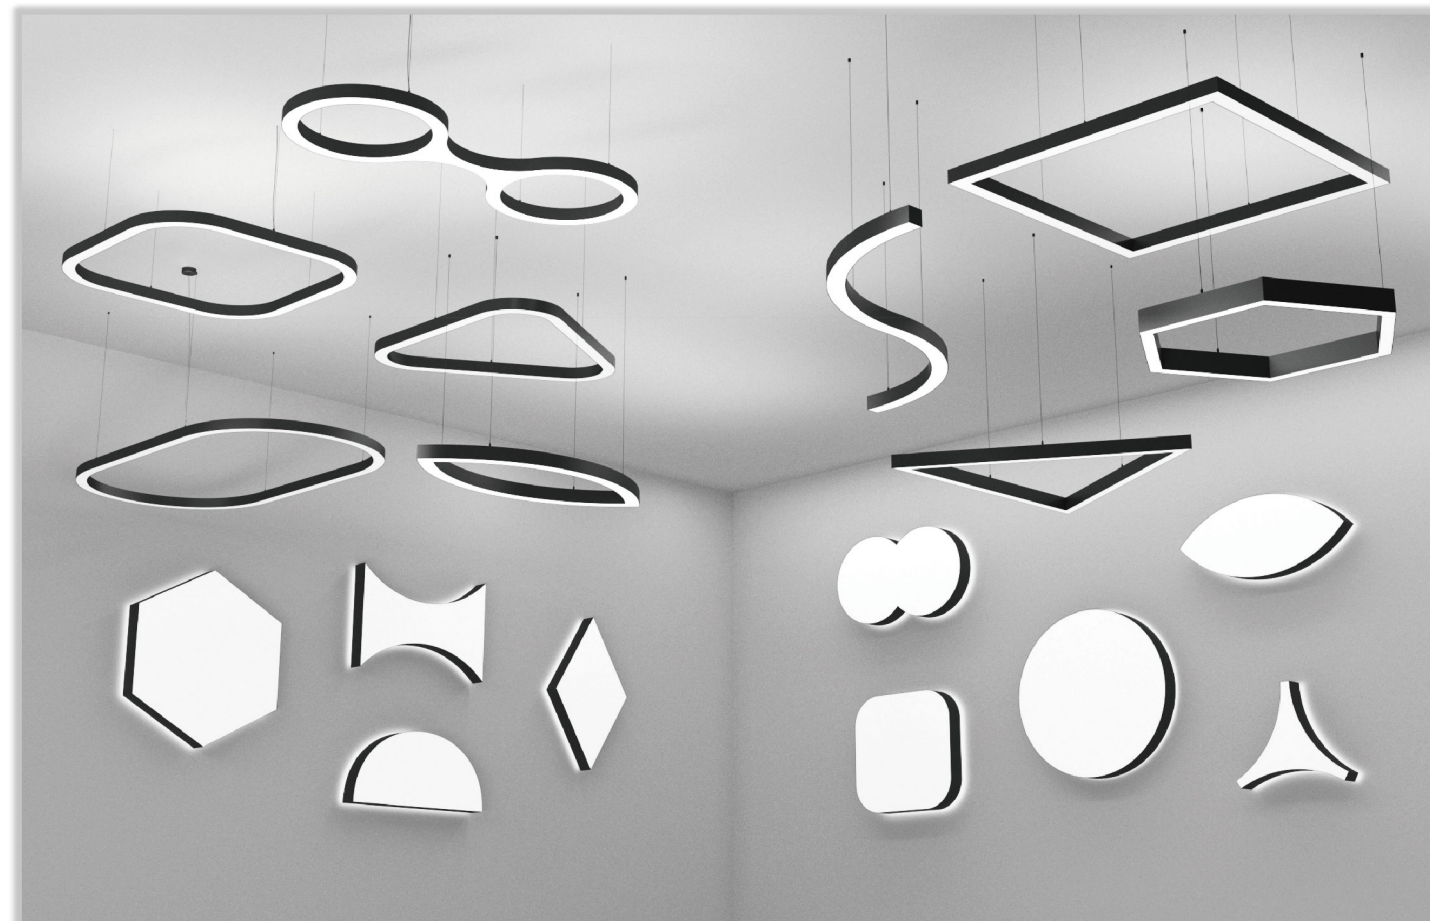


Highly flexible system consisting of linear, curved, hollow and solid elements

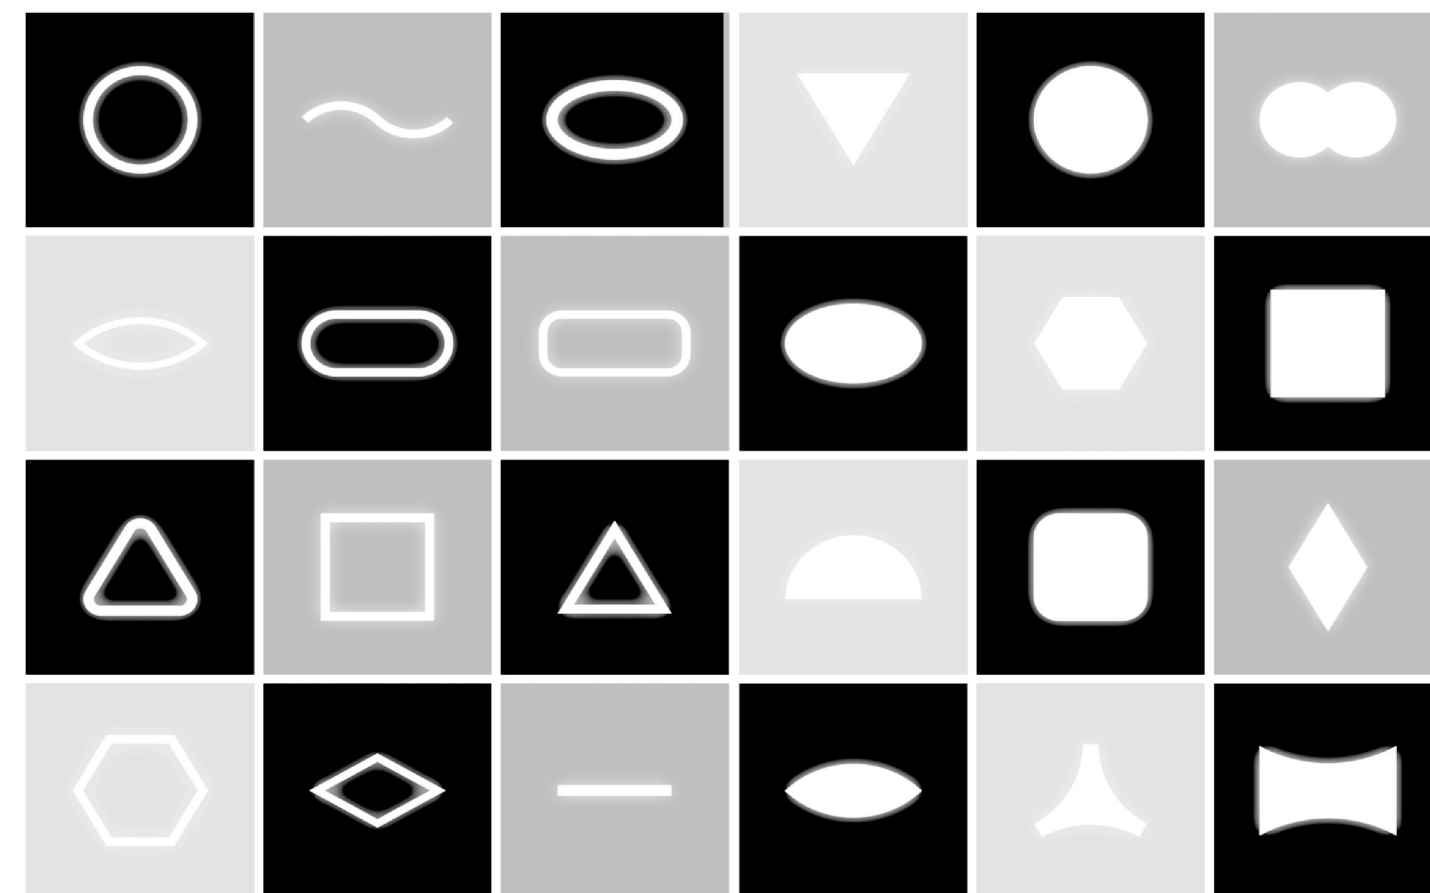


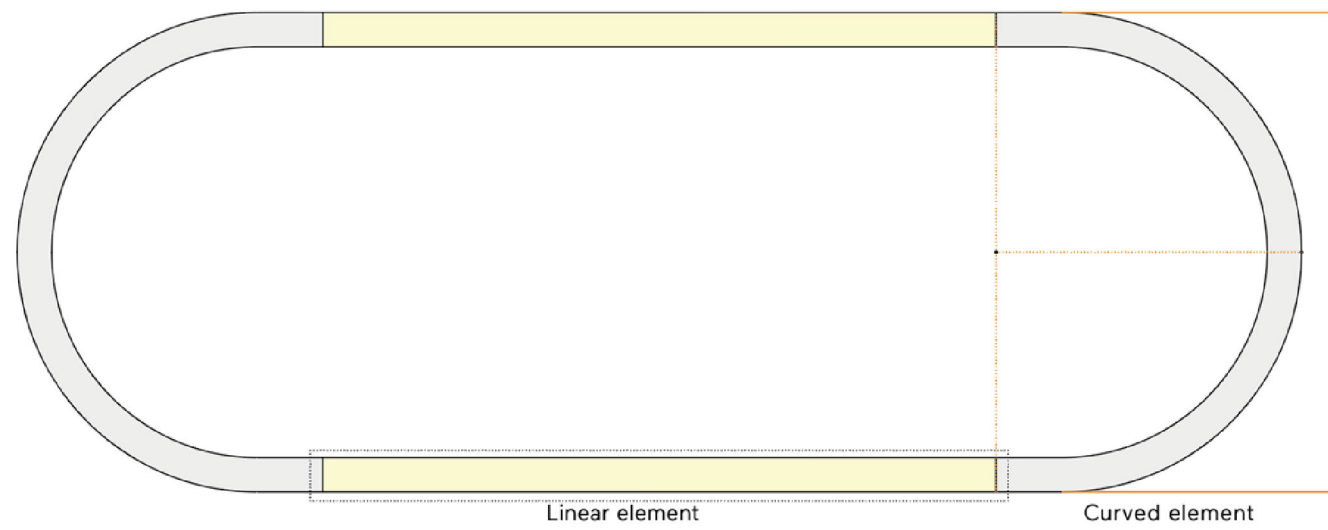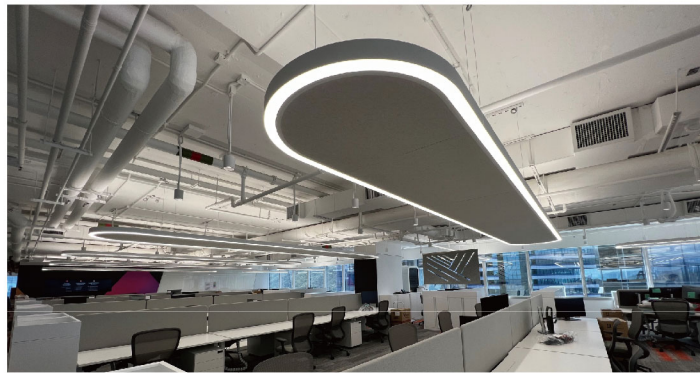


Rounded Square element





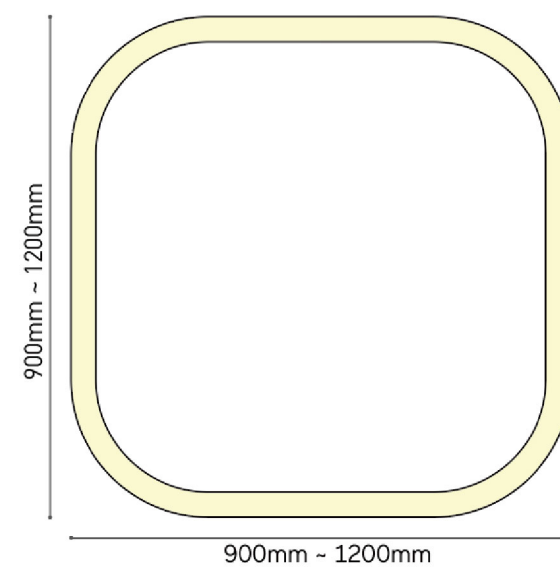


Rounded Rectangle element

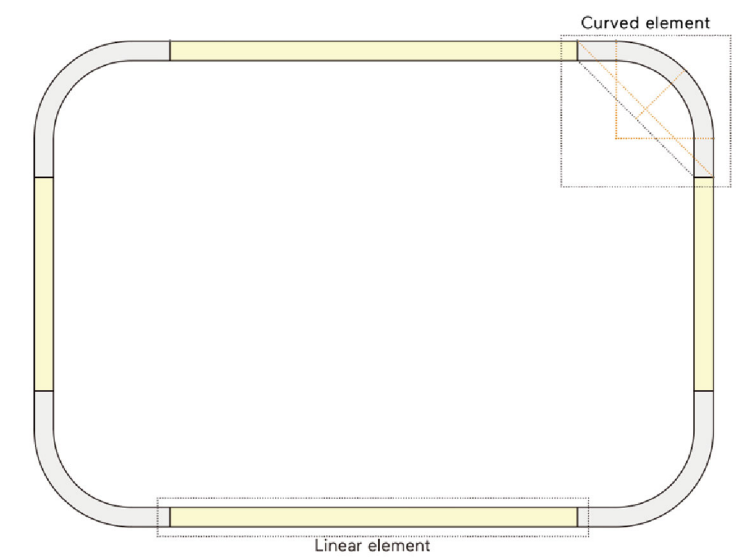

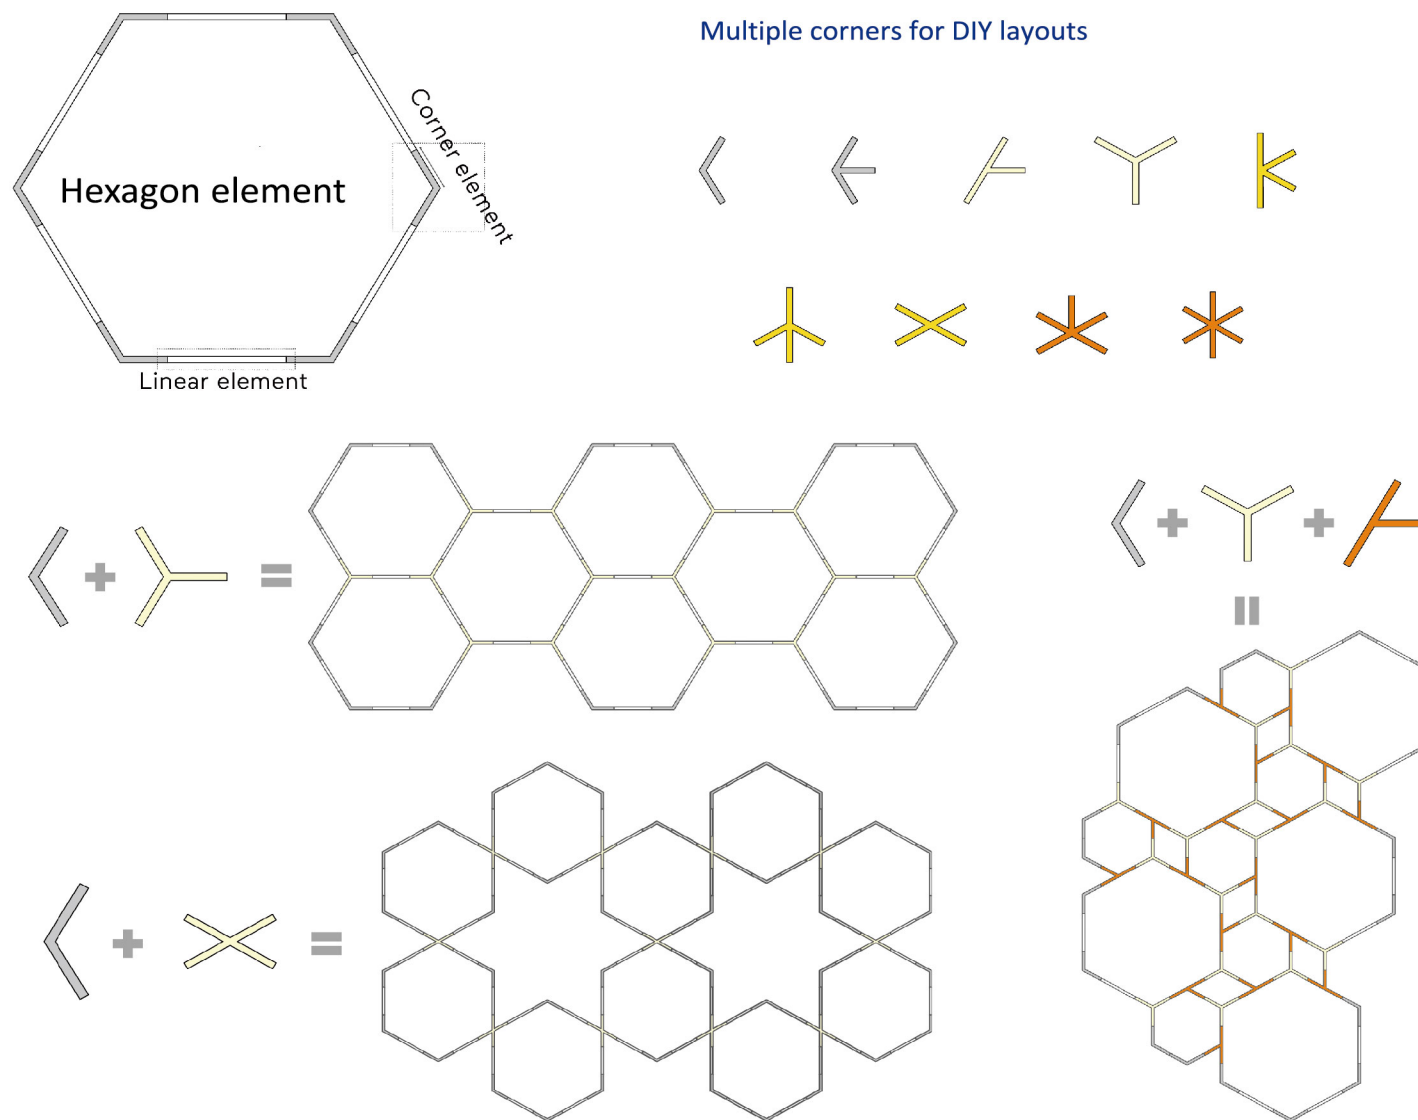

Enhance lighting projects with our **DIALux** evo layout Lighting solutions service. It provides comprehensive details, including 3D models with joints, continuous lines, mounting types, colors, photometric calculations, and other valuable information essential for lighting projects.

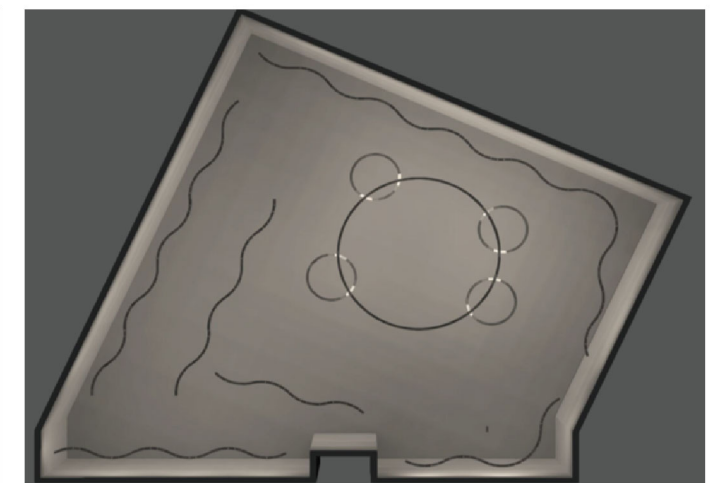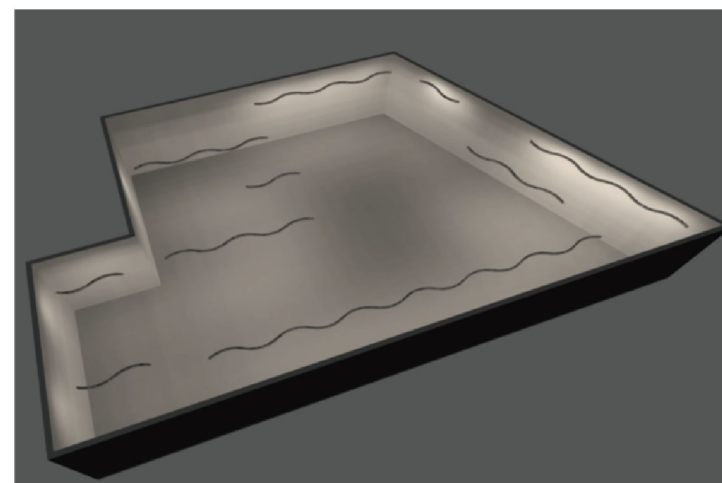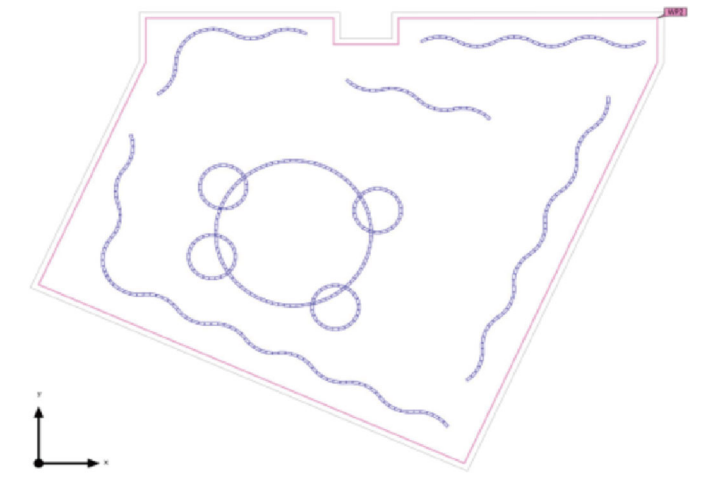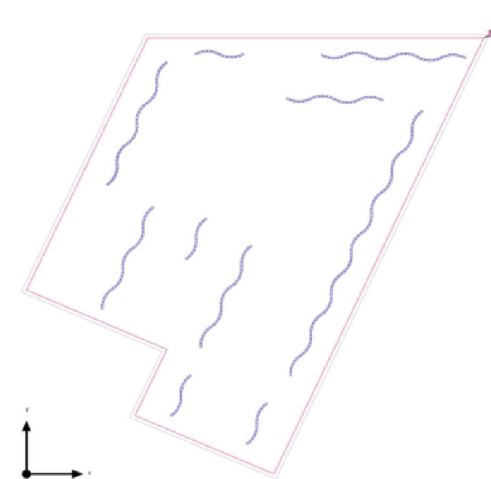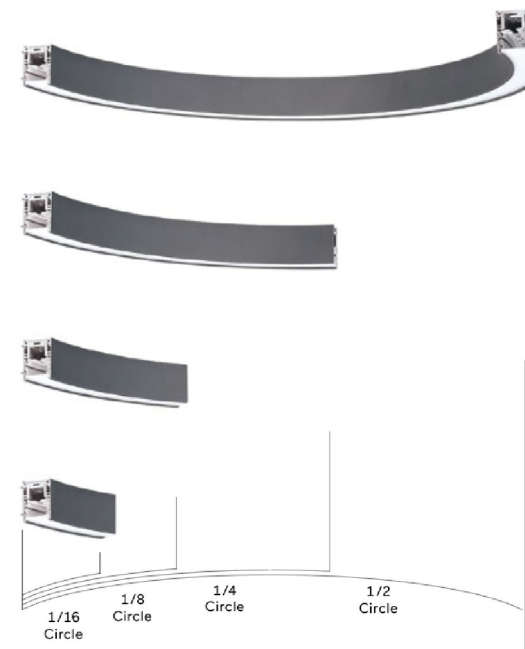

# Project Show



▲ 4S Car Store Project in France



▲ Church project in UK

▼ Luxurious office project in USA

▼ Luxurious office project in Germany



# Project Show



▲ Large ring suspension light project for supermarket in Australia

▼ Customized design curved profile light for bank in Singapore



◆ RGBW color changing Circular Led Pendant Light in France



# Project Show



◆ Circular ring lights for Gym in Germany



◆ Circular ring lights for Gym in Germany



# Project Show



▲ Luxurious office project in Germany



▼ Luxurious office project in UK

◆ Curved Corner Rectangle LED Pendant Light



# Project Show



◆ Rounded Square element and Rectangle element in Kenya



◆ Acoustic Lighting Projects for bank, in Hong Kong



# Project Show



▲ Curved Profile Continuous S Shape Light for gym in Australia



▼ Curved Profile Continuous Light in USA

▲ Customized Curved Profile Led Pendant Light in USA

▼ Oval Light for Conference Room in UAE

